

UrbanShade® Double-Bracket System


Motorized and Manual

The UrbanShade family now includes an economical two-shade-band system. It can accommodate any combination of:

- Two motorized shades.
- Two manual shades.
- One motorized and one manual shade.

The configuration is a shade system which provides a variety of light- and heat-control options. The versatile design allows two shade bands on two individual tubes to be offset-mounted on a single bracket with any combination of motorized or manual lift systems. The design eliminates the need for two separate brackets and reduces labor, installation time, and cost.

The UrbanShade Double-Bracket can darken a room with maximum privacy or allow views to the outside with solar protection by raising only the opaque shadecloth.

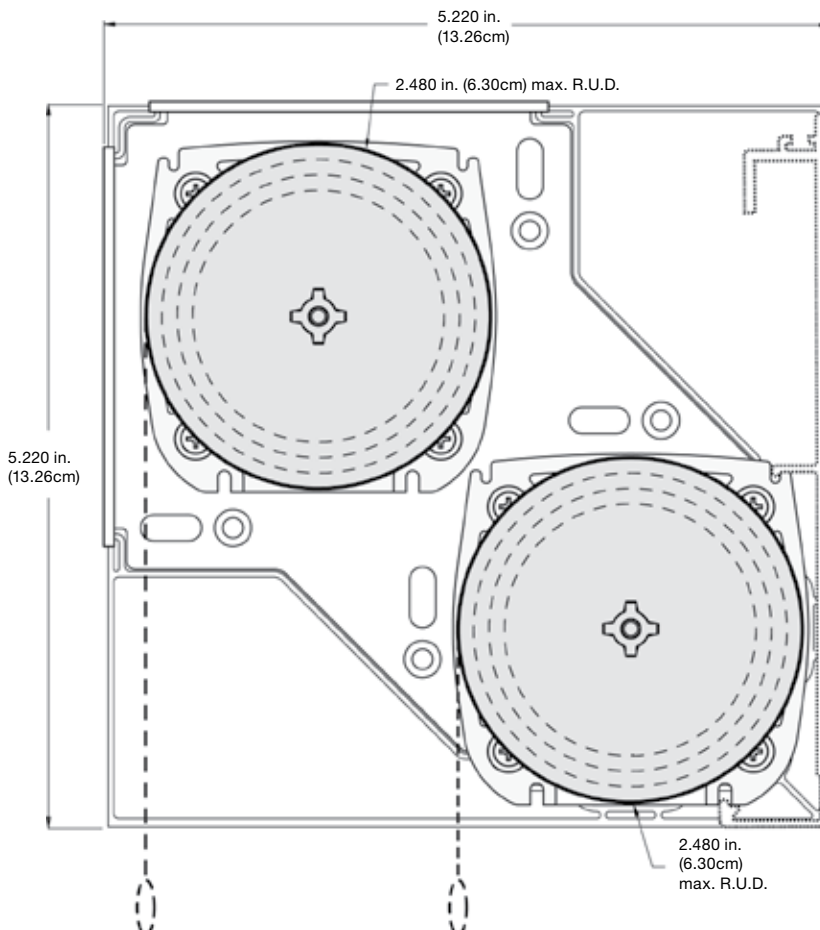

Features

- Available in a compact size of 5.22 x 5.22 in. (13.3 x 13.3cm).
- Fascia offered in captured: square and round, and continuous: square and round, in a full range of colors.
- Suitable for home theaters, media and conference rooms, and bedrooms.
- Cost effective.
- Aesthetically pleasing, strong brackets made of metal with plastic sheaths.
- Choice of battery powered with RTS wireless remote control or low voltage with wireless RTS, RS485, or dry-contact controls.

The UrbanShade product family

Single-Bracket System


- Manual chain-driven system with an optional LAM (Lift-Assist Mechanism).
- Motorized—battery powered with RTS wireless remote control.
- Motorized—low voltage with wireless RTS, RS485, or dry-contact control.
- Manual cassette.
- Motorized cassette.
- Manual-to-motorized conversion kit.

Double-Bracket System

- Manual-to-motorized conversion kit.
- Manual double-bracket with an optional LAM (Lift-Assist Mechanism).
- Motorized double-bracket.

UrbanShade® Double-Bracket System

Motorized and Manual

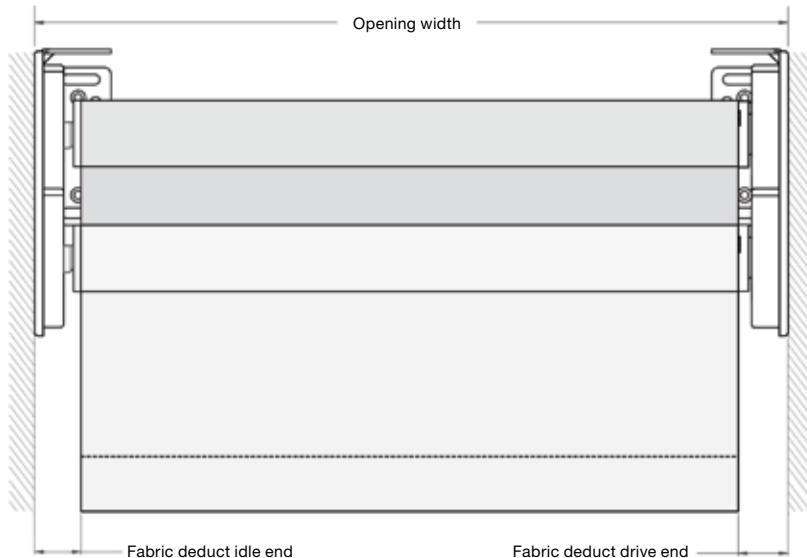

Shade system deductions

Deduct	Options	Drive	Idle	Total
Fabric (motorized)	Concealed Hembar	0.750 in. (1.91cm)	0.688 in. (1.75cm)	1.438 in. (3.65cm)
	Exposed 1.5 in. (3.81cm) Hembar			
	Exposed Universal Hembar			
	Exposed Hembar with Guide Cable			
Fabric (manual w/ LAM) (manual w/o LAM)	Exposed Hembar with Guide Wheel	1.25 in. (3.18cm)	1.25 in. (3.18cm)	2.5 in. (6.35cm)
	Concealed Hembar	0.875 in. (2.22cm)	0.688 in. (1.75cm)	1.563 in. (3.97cm)
	Exposed 1.5 in. (3.81cm) Hembar			
	Exposed Universal Hembar			
Exposed Hembar with Guide Cable				
	Exposed Hembar with Guide Wheel	1.375 in. (3.49cm)	1.375 in. (3.49cm)	2.750 in. (6.99cm)

Shade systems and size and weight limitations

	Tube diameter	Motor	Max. R.U.D.	Max. hanging weight	Max. no. turns	Min. opening width
Motorized	1.375 in. (3.49cm)	LT-30	2.48 in. (6.30cm)	< or = 14.2 lbs. (6.44kg)	40	13 in. (33.02cm)
	1.563 in. (3.97cm)	ST-30		< or = 22.6 lbs. (10.25kg)	35	19 in. (48.26cm)
Manual w/LAM	1.230 in. (3.12cm)	-		< or = 12 lbs. (5.44kg)	28	21 in. (53.34cm)
	1.375 in. (3.49cm)	-		< or = 12 lbs. (5.44kg)		
Manual w/o LAM	1.563 in. (3.97cm)	-		< or = 11 lbs. (4.99kg)	No limit	12 in. (30.48cm)
	1.230 in. (3.12cm)	-		< or = 7 lbs. (3.18kg)		
	1.375 in. (3.49cm)	-	< or = 6 lbs. (2.72kg)			
	1.563 in. (3.97cm)	-	< or = 5.5 lbs. (2.49kg)			



MechoSystems
Corporate Headquarters
42-03 35th Street
Long Island City, NY 11101

T: +1 (718) 729-2020
F: +1 (718) 729-2941
E: info@mechosystems.com
W: mechosystems.com

